

Universal flat-roof gutters and inspection ducts


The universal Soba flat-roof gutters and inspection ducts are well-suited for pedestrian areas on terraces, roof plantings and other applications.

Advantages of Soba drainage systems

- Various widths and heights of lower gutter sections are available and can be combined with various covers
- Fine lateral perforation delivers uniform drainage flow
- Appropriate drainage ducts can be supplied
- Short delivery lead time (available ex stock)
- Site-specific custom manufacture available at short notice
- Long service life
- Material thicknesses:
 - Grilles up to 1.50 mm
 - Lower sections 1.00 mm
 - Other material thicknesses on request
























Perfectly designed gutters and profile sections for your building project

Maximum individuality in material and design!








Soba angles for gravel and grit

The new gravel angles delights with its visually appealing design. With its fine slotted holes, it can be used with gravel as well as with stone chippings. Assembly is quick and easy, using a bracket that can be bonded to the polymer sealant strip with an adhesive. The seal is neither perforated nor do the brackets have to be recessed.

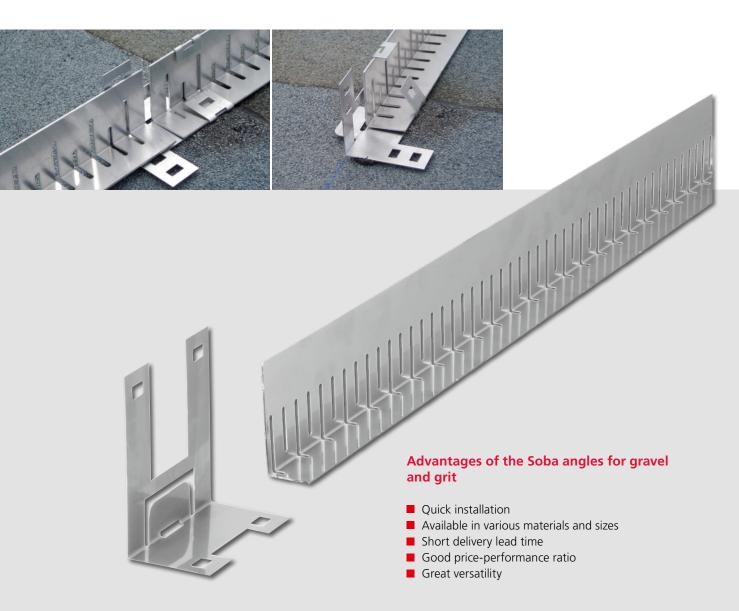

Angles for gravel and grit, length 3000 mm

Designation	Dimensions
Copper 1.50 mm	40/60 mm
Aluminum 2.00 mm	40/60 mm
Aluminum 2.00 mm	40/100 mm
Stainless steel 1.25 mm	40/60 mm
Stainless steel 1.25 mm	40/100 mm

Brackets for gravel and grit

Designation	Dimensions
Copper 0.80 mm	40/60 mm
Aluminum 1.00 mm	40/60 mm
Aluminum 1.00 mm	40/100 mm
Stainless steel 0.60 mm	40/60 mm
Stainless steel 0.60 mm	40/100 mm

Soba joint profile

Walkways may not be laid flush to the facade (as defined in SIA 271). With its unique joint profile, Soba Inter AG offers a visually clean solution for such connections. The Soba joint profile facilitates the escape of humidity from gaps between walkway slabs and facade connections and greatly reduces the likelihood of any weed growth. Furthermore, the bordered drainage and protection layers may be covered discretely and effectively.





Advantages of the Soba joint profiles

- Render stays dry in the joint area
- Joint remains free of weeds
- Conceals drainage and protected areas with a border
- Facilitates a clean connection to facades
- Simple and quick to install

Material

Designation

Stainless steel 0.80 mm

Standard sizes

Dimensions

L x W x H: 2000 x 18 x 30 mm

L x W x H: 2000 x 18 x 40 mm

5 soba inter





Soba Inter AG

Garden + Terrace Im Grund 15 CH-5405 Baden-Dättwil Phone +41 56 483 35 20 Fax +41 56 483 35 22 info@soba-inter.com www.soba-inter.com

A Schoop Group company.



